

# Fiber Optic Closure

## Bolted Closure - BOFC Series

AJW BOFC series is in-line, bolted closure with IP68 degree. It is designed to manage fiber splices with ease of maintenance for installers. Its versatility and durability allow direct buried, underground and aerial applications.



### BOFC-A1

- Managing up to 8 fiber splices
- Instant on-site repair and restoration




### BOFC-B2

- Managing up to 48 fiber splices
- Suited for aerial application



### BOFC-B4

- Managing up to 96 fiber splices
- Branching option of adapter attachment

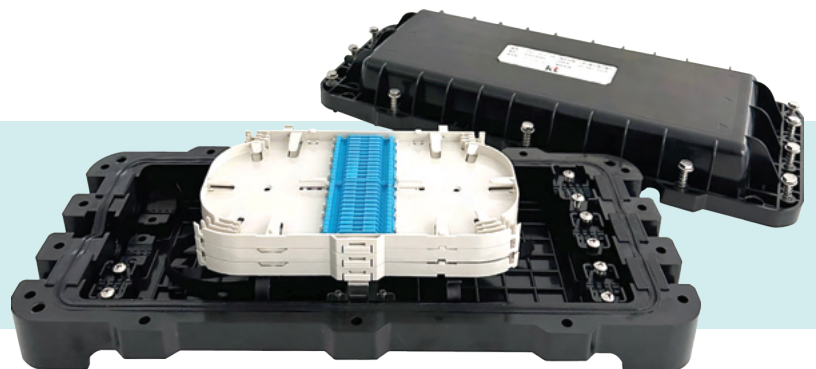


### BOFC-C1

- Managing up to 144 fiber splices

### BOFC-C2

- Managing up to 288 fiber splices

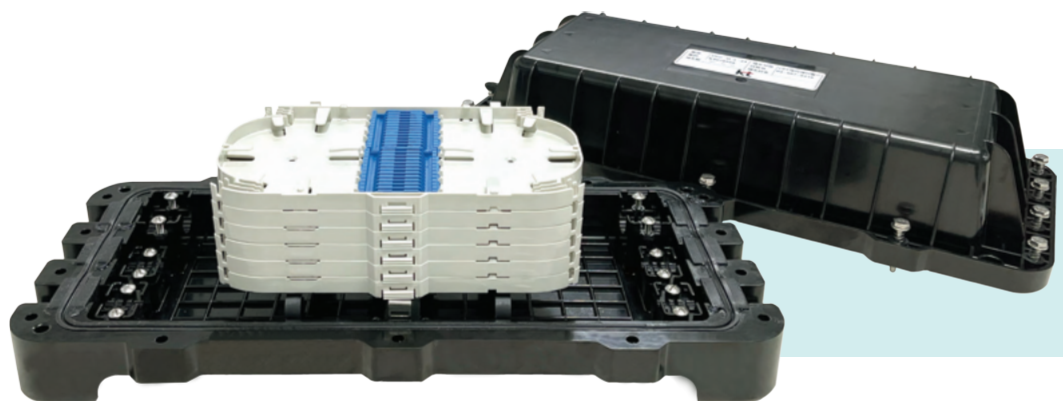

All components are compliant with EU RoHS Directive (2011/65/EU amended by 2015/863).

# Fiber Optic Closure


## Micro-duct Cable Closure - MDC Series

Fiber optic closure for micro-duct cable offers a various types of branching options with the cable ports for micro-duct cables. Its internal structure with cable holder allows ease of branched cable management. Its durable design is suitable for various applications in different environments.



**ZOFC-A1-MDC**

- Micro-duct cable application
- Branching only

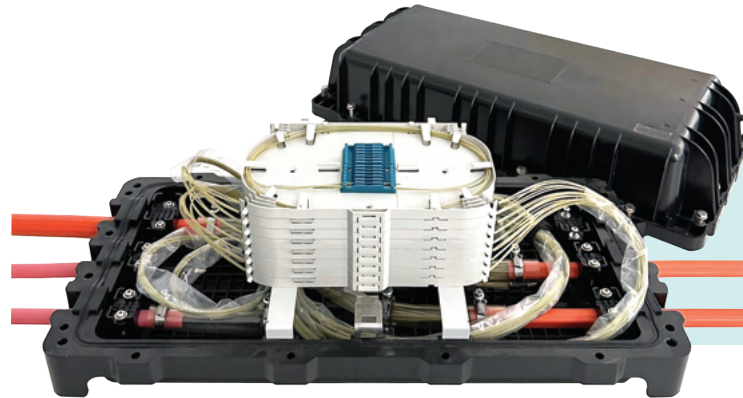

**BOFC-D1-MDC**

- Micro-duct cable application
- Branching & fiber splicing

## Specifications

Model No.	Dimension (mm) L x W x H	Weight	Cable Port	Splice Tray	Fiber Splice (Single / Double)	IP
BOFC-A1	196 x 70 x 30	246g	2 (Ø3)	—	4 / 8fs	68
BOFC-A2	165 x 130 x 40	388g	2 (Ø3, Ø8)	1	6 / 12fs	68
BOFC-B1	200 x 170 x 80	940g	4 (Ø3, Ø8)	1	12 / 24fs	68
BOFC-B2	200 x 170 x 90	1.0kg	4 (Ø3, Ø8)	2	24 / 48fs	68
BOFC-B4	330 x 195 x 125	2.2kg	6 (Ø3 ~ Ø17) 6 (Ø3 ~ Ø17), SC: 16 *	4 2 *	48 / 96fs 24 / 48fs *	68
BOFC-C1	510 x 230 x 110	3.8kg	6 (Ø3 ~ Ø20)	3	72 / 144fs	68
BOFC-C2	510 x 230 x 145	4.4kg	6 (Ø3 ~ Ø20)	6	144 / 288fs	68
BOFC-D1	610 x 300 x 184.5	6.7kg	6 (Ø3 ~ Ø27)	6 (Single) 4 (Ribbon)	144 / 288fs 1,152fs (Ribbon)	68
ZOFC-A1-MDC **	210 x 95 x 51.5	400g	2 Entry Port (Ø15 ~ Ø18.5) 4 Branch Port (Ø5 ~ Ø8.5)	—	—	68
BOFC-B4-MDC **	330 x 195 x 125	2.2kg	6 (Ø3 ~ Ø17)	4	48 / 96fs	68
BOFC-C2-MDC **	510 x 230 x 145	4.4kg	6 (Ø3 ~ Ø20)	2	48 / 96fs	68
BOFC-D1-MDC **	610 x 300 x 184.5	6.7kg	6 (Ø8 ~ Ø27)	8	96 / 192fs	68

\* Only available for SC adapter panel installed model

\*\* Micro-duct cable application

All components are compliant with EU RoHS Directive (2011/65/EU amended by 2015/863).