

# Fiber Optic Closure

## Hinged Closure - ZOFC Series


AJW ZOFC series is in-line, hinged closure with IP68 degree. It is designed to manage fiber splices with ease of maintenance for installers. Its versatility and durability allow direct buried, underground and aerial applications. It offers simple re-entry system that does not require an electric hand tool.



ZOFC-B2



ZOFC-B1

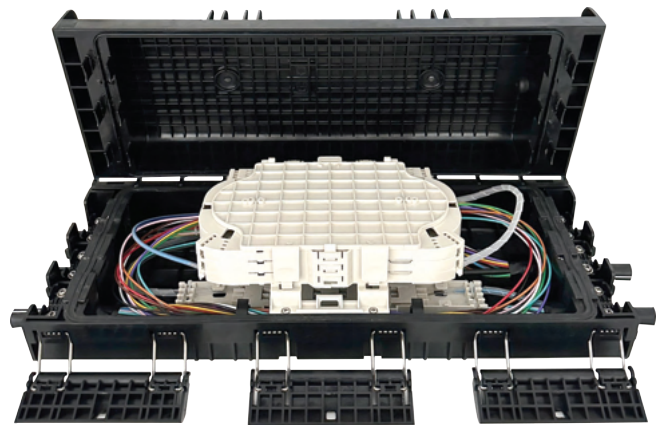

ZOFC-D2

- Managing up to 144 fiber splices
- Dummy tray for mid-span application

## Specifications

Model No.	Dimension (mm) L x W x H	Weight	Cable Port	Splice Tray	Fiber Splice (Single / Double)	Adapter Port	IP
ZOFC-B1	330 x 190 x 103	2.2kg	6 (Ø3 ~ Ø17)	4	96fs	SC: 16 *	68
ZOFC-B2	266 x 173.4 x 90.5	1.3kg	4 (Ø3 ~ Ø17)	2	24 / 48fs	SC: 8 *	68
ZOFC-D2	540 x 216 x 123	3.8kg	6 (Ø8 ~ Ø20)	6	144fs	—	68

\* Only available for SC adapter panel installed model

All components are compliant with EU RoHS Directive (2011/65/EU amended by 2015/863).